

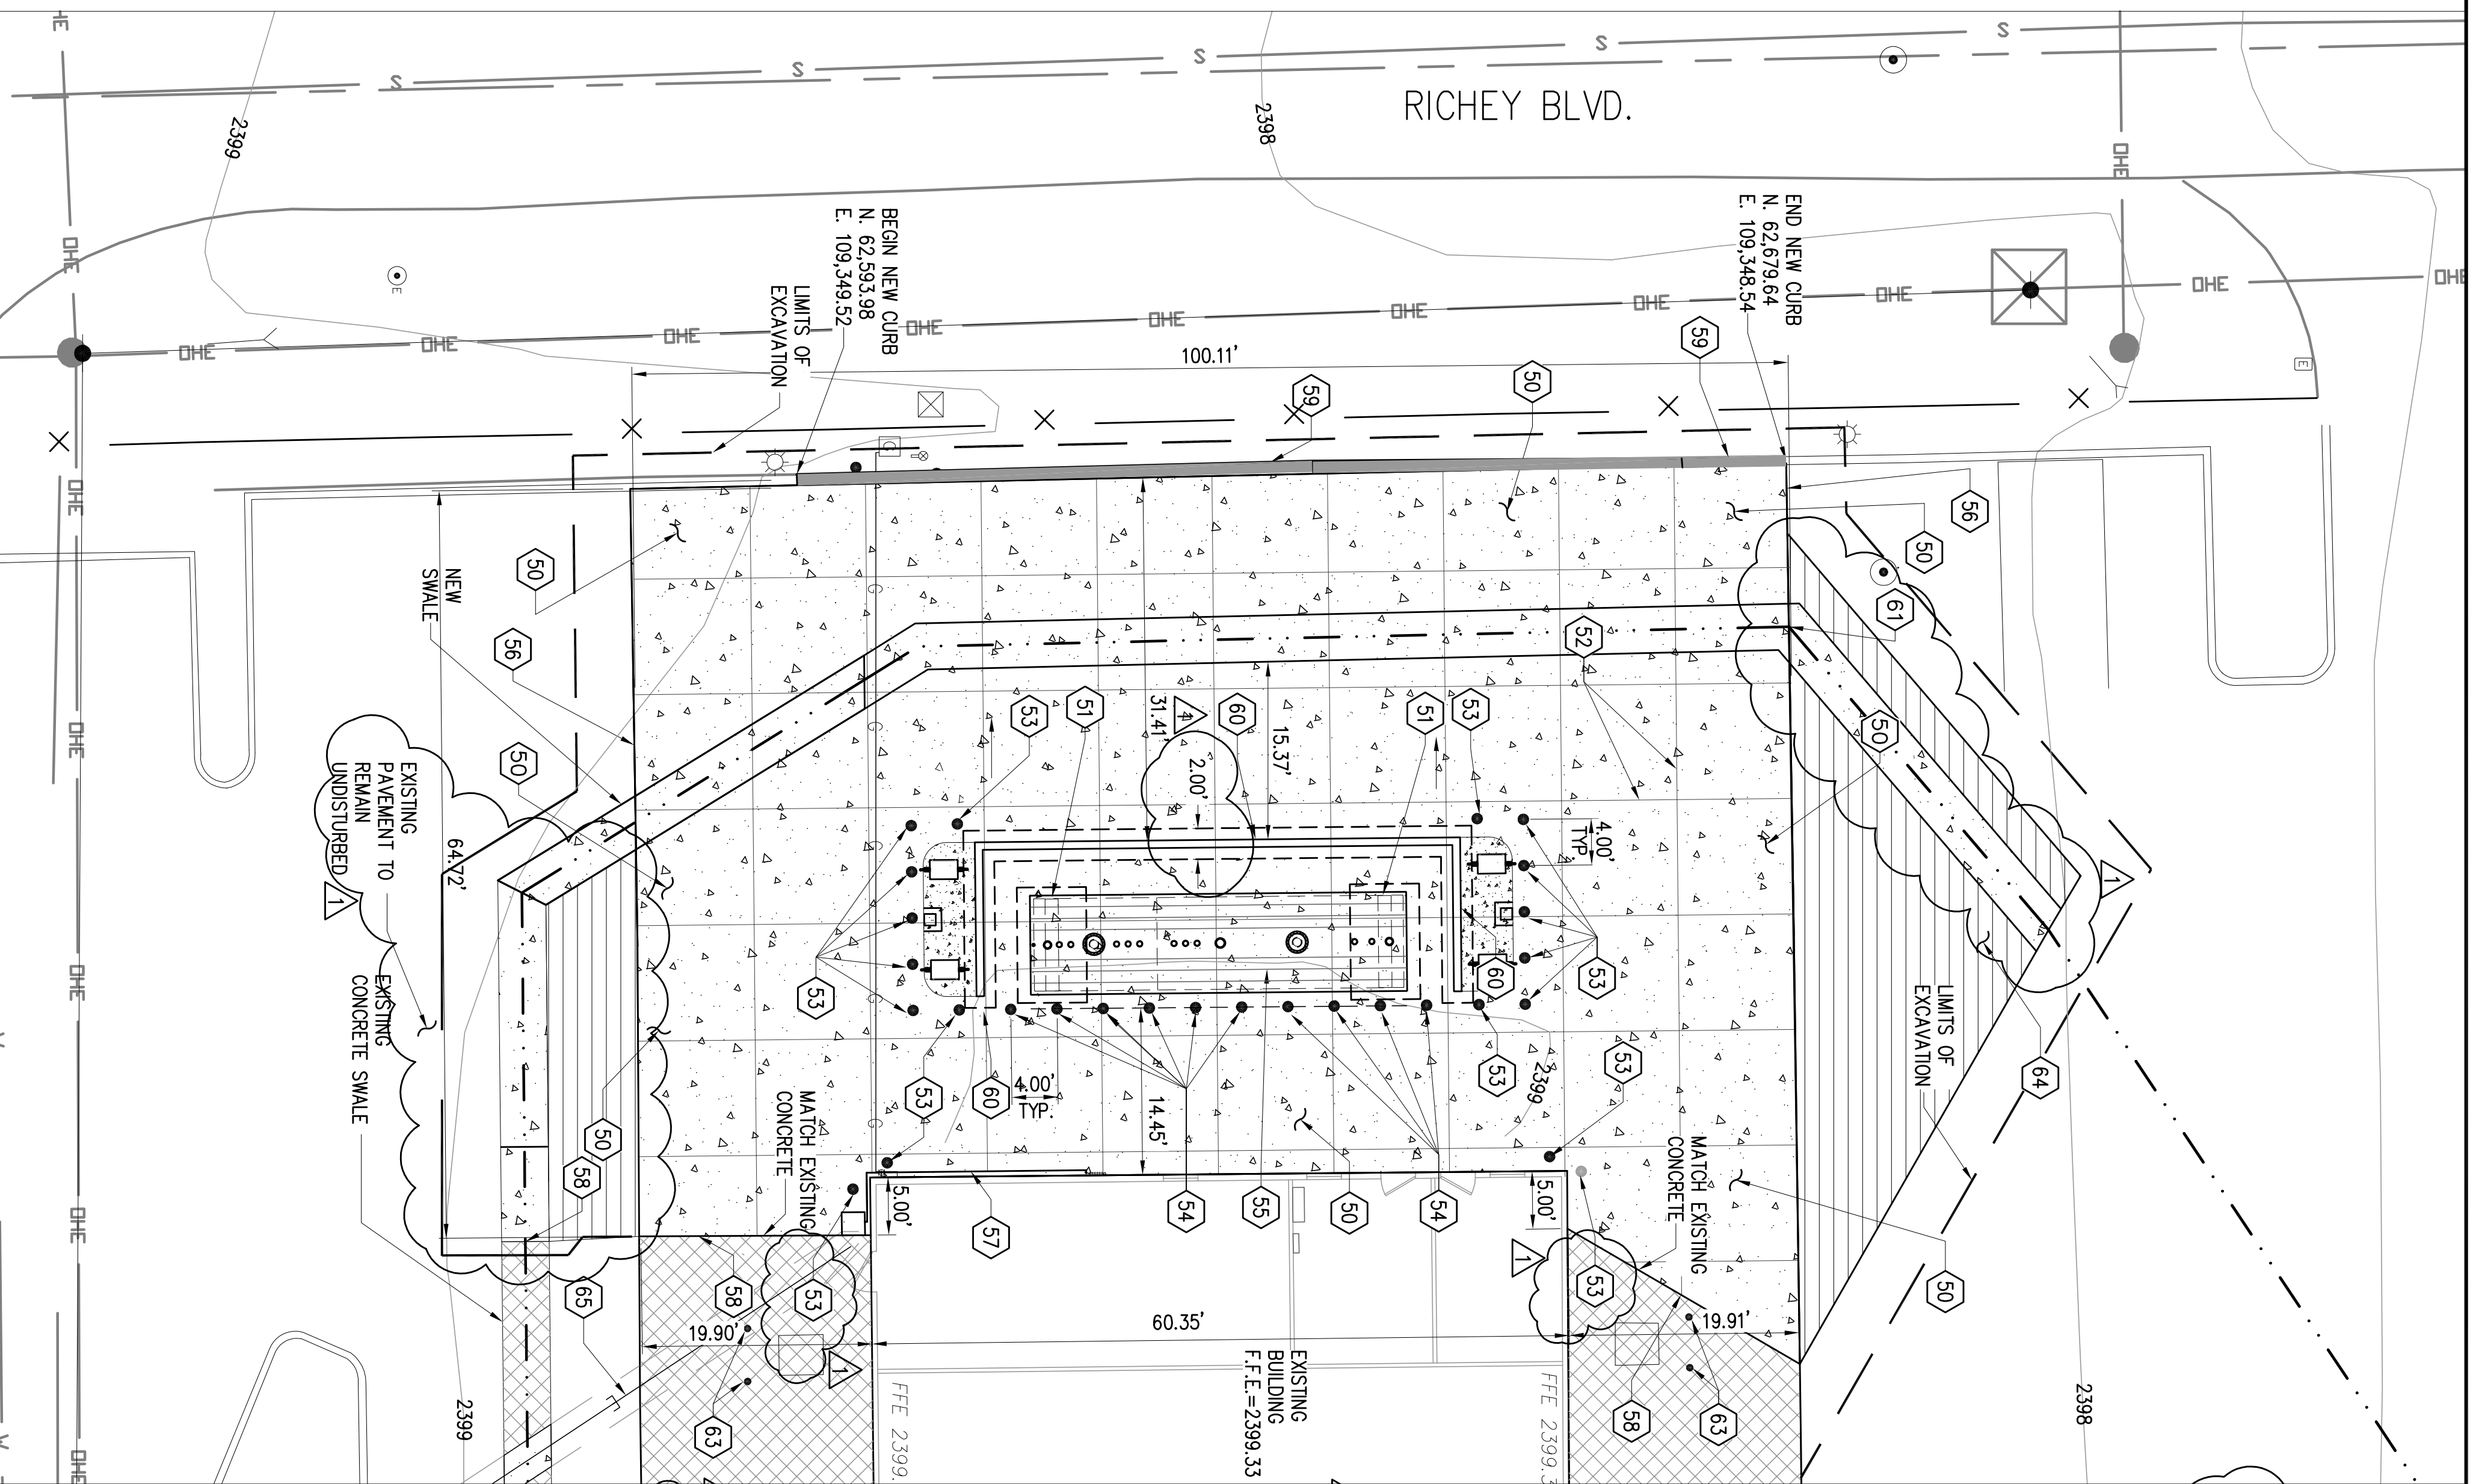


CIVIL DEMOLITION PLAN
SCALE: 1" = 10'



CIVIL SITE IMPROVEMENT PLAN
SCALE: 1" = 10'



DEMOLITION KEY NOTES

1. EXISTING PAVEMENT TO BE REMOVED.
2. EXISTING WATER & COMPRESSED AIR LINES TO BE REMOVED. SEE MP104.
3. (2) EXISTING 10" ϕ X 26' LONG 15,000 GALLON U.G. FUEL TANKS & APPURTENANCES TO BE REMOVED. CONTRACTOR TO FOLLOW ADEO USE REMOVAL PROCEDURES. TOP OF TANKS IS 4' BELOW GRADE. SEE SHEET MD101.
4. EXISTING CONCRETE TO BE REMOVED.
5. REMOVE ALL CONCRETE & ASPHALT WITHIN SAW CUT LIMITS OF LEGALTY. PER ADEO USE REMOVAL REQUIREMENTS.
6. EXISTING SOIL AROUND JUST TO BE REMOVED & DISPOSED OF LEGALTY. PER ADEO USE REMOVAL REQUIREMENTS.
7. EXCAVATION OF REMOVED SOILS AROUND JUSTS TO BE BACKFILLED WITH ENGINEERED FILL, COMPACTED IN 10" LIFTS MEETING A MINIMUM 97% DENSITY TEST. ALL LIFTS TO BE INSPECTED BY 3rd PARTY TESTING AGENT. CONTRACTOR TO COORDINATE WITH TESTING AGENT.
8. REMOVE ALL UNDERGROUND ELECTRICAL WIRING & CONDUIT. CONTRACTOR TO VERIFY LOCATION PRIOR TO CONSTRUCTION.
9. DEMO EXISTING OIL LINE.
10. EXISTING GRAVEL, DEBRIS & CONCRETE WASTE TO BE REMOVED.
11. EXISTING CONCRETE ISLAND FUEL DISPENSERS & BOLLARDS TO BE REMOVED.

SITE IMPROVEMENT KEY NOTES

50. NEW 6" CONCRETE SLAB W/ #4 @ 16" O.C. EACH WAY ON 4" ABC PER DETAIL 1/C/S01. SLOPE AWAY FROM FUEL TANK @ 0.5% MIN.
51. NEW CONCRETE TANK SUPPORT PIER. SEE SB101.
52. CONTROL JOINTS 12' O.C. PER DETAIL 3/G/S01.
53. INSTALL (18) BOLLARDS PER DETAIL 4/C/S01.
54. INSTALL (10) BOLLARDS PER DETAIL 5/C/S01.
55. NEW 12,000 GALLON ABOVE GROUND FUEL TANK. SEE MP501.
56. SAWCUT TRIM, TACK & JOIN NEW CONCRETE TO EXISTING PAVEMENT. SEE DETAIL 9/C/S01.
57. NEW WATER LINE. SEE MP101.
58. SAWCUT TRIM, TACK AND JOIN TO EXISTING CONCRETE.
59. NEW 6" CURB. SEE DETAIL 7/O/S01.
60. NEW CMU WALL & FOOTING. SEE SB101.
61. NEW CONCRETE SWALE. JOIN NEW CONCRETE TO EXISTING PAVEMENT. SEE DETAIL 8/C/S01.
62. NOT USED.
63. EXISTING BOLLARD TO REMAIN.
64. NEW ASPHALT PAVEMENT 3" A.C./6" A.B.C. TO MATCH EXISTING PAVEMENT. SEE DETAIL 6/O/S01.
65. NEW ELECTRICAL. SEE SHEET EP101.

MATERIALS LEGEND

- EXIST. CONCRETE TO REMAIN
- EXISTING CONCRETE TO BE REMOVED
- EXISTING PAVEMENT TO BE REMOVED
- EXISTING GRAVEL BE REMOVED
- NEW PAVEMENT
- NEW CONCRETE



RICHEY BLVD. FUEL TANK REPLACEMENT

PIMA COUNTY
FACILITIES MANAGEMENT
150 WEST CONGRESS, 5TH FL.
TUCSON, AZ 85701

ARCHITECTURE
ENGINEERING
CONSTRUCTION MANAGEMENT

2051 W. SUNSET RD.
SUITE NO. 101
TUCSON, ARIZONA 85704
TEL: (520) 293-1488
FAX: (520) 293-8349
WWW.M3PN.COM

Revisions

Description	Date
REVISIONS 3/15/11	

Drawn: DEJ
Checked: WR
Issue Date: 12-17-2010
Drawing Title
CIVIL DEMOLITION SITE IMPROVE PLAN

Sheet Number
C101

M3PN 100100
Last Update: 7.1.2011